

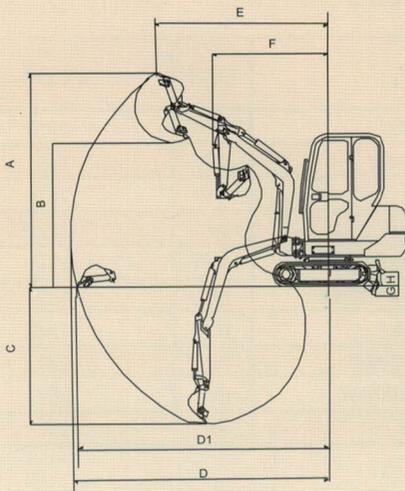


YC15-8

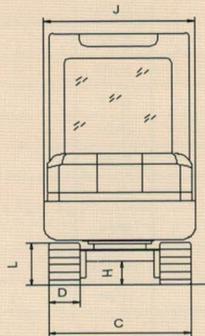

- Simple, easy and comfortable operating with high sensibility.
- Equipped with adjustable chassis to improve working stability. Easy and simple operating.

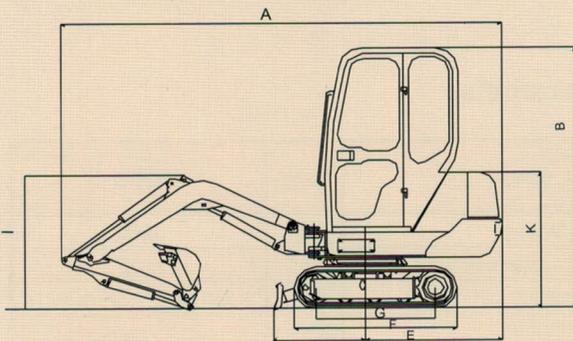

1.Dimension parameter

Code	Item	Unit	YC15-8	
			810S	
	Operating Weight	Kg	1725	
	Standard bucket capacity	m ³	0.04	
	Name of engine		PERKINS403C-11 / KUBOTAD1105	
	Power of engine	KW/rpm	14. 7/2200	14. 2/2200
A	Machine length	mm	3600	
B	Machine height	mm	2280	
C	Overall width	mm	1000 ~ 1300	
D	Crawler width	mm	230 (Rubber crawler)	
E	Platform slewing radius	mm	1175	
F	Crawler length	mm	1405	
G	Wheel-base	mm	1045	
H	Min ground clearance	mm	190	
I	Overall height	mm	1065	
J	Width of platform	mm	1014	
K	Height of engine hood	mm	1210	
L	Height from floor to platform	mm	487	
	Width of Machine	mm	1014	
	Width of Bucket	mm	400	
	Walking speed(low/high)	rpm	2	
	Platform slewing speed		10 ~ 12	
	Cab		●	
	Canopy			
	Boom swing angle (left/right)	o	63-48	

Note: Technical parameters are subject to change without prior notice!

2.Operating parameters

Code	Item	Unit	YC15-8	
			810S	
A	Max. digging height	mm	2950	
B	Max. Dumping height	mm	2040	
C	Max. digging depth	mm	1810	
D	Max. digging radius	mm	3570	
D1	Max. horizontal digging length	mm	3460	
E	Max. digging height radius	mm	2650	
F	Min. slewing radius	mm	1700	
G	Max. depth of Bulldozer	mm	172	
H	Max. height of Bulldozer	mm	192	
	Max. digging force	kN	10.5	