



# YC60-9



CE

Machine weight : 5700 kg

Bucket capacity : 0.21 m<sup>3</sup>

Engine power : 30.7/2200 kW/rpm

- Structural Reliability
- Excellent Performance
- High Efficiency

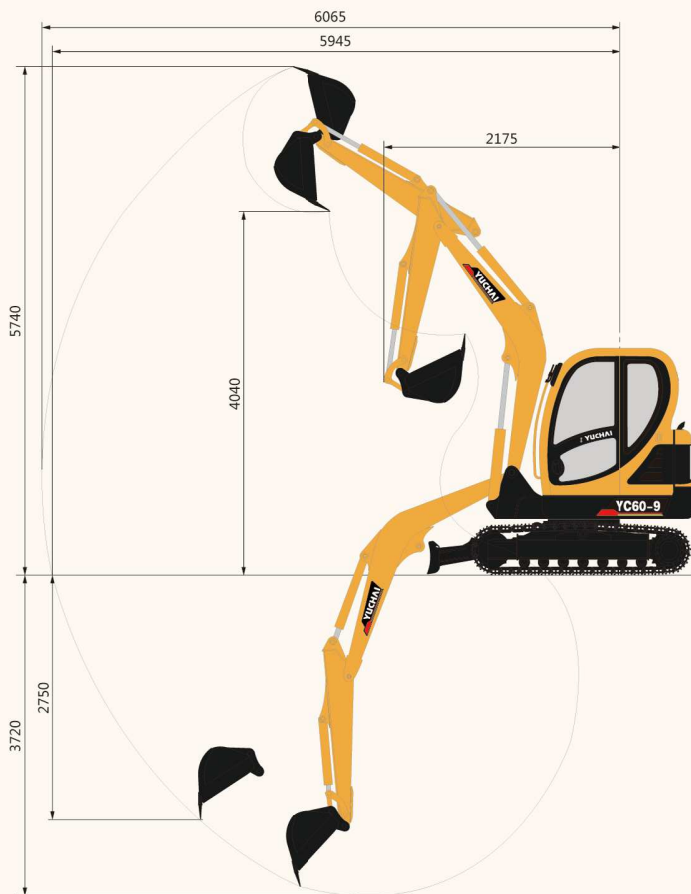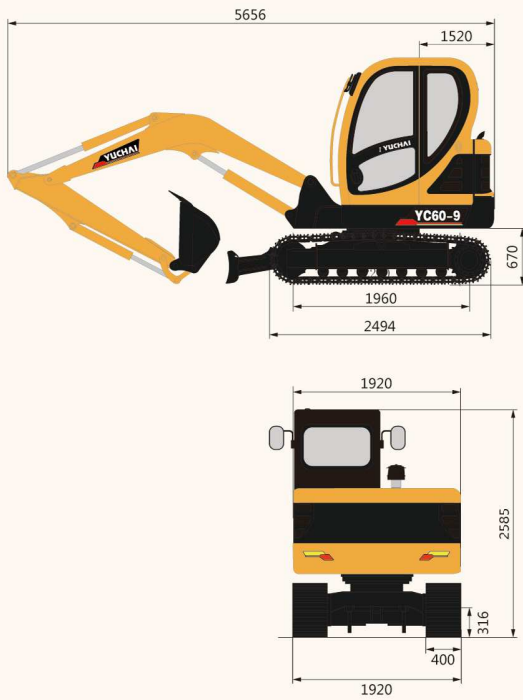

## ► Technical Specification

### Basic parameter

Machine weight	5700 kg
Bucket capacity	0.21 m <sup>3</sup>
Width of bucket	742 mm

### Performance parameter

Engine model	Kubota V2403
Engine power	30.7/2200 Kw/rpm
Gradeability	70%(35°)
Max. digging force of arm	27.5 kN
Max. digging force of bucket	36.6 kN
Traveling speed	2.2/3.6 km/h
Max. hauling force	46.5 kN
Slewing speed of platform	9~11 rpm

### Operating parameter

Max. digging height	5740 mm
Max. digging depth	3720 mm
Max. digging radius	6065 mm
Max. digging radius on ground level	5945 mm
Max. dumping height	4040 mm
Min. slewing radius	2175 mm
Max. vertical digging depth	2750 mm

### Transportation dimension

Overall length of transportation	5656 mm
Overall width	1920 mm
Overall height	2585 mm

### Other Parameter

Width of undercarriage	1920 mm
Length of track	2494 mm
Width of track	400 mm
Height between undercarriage and ground	316 mm
Height between platform and ground	670 mm
Platform tail turning radius	1520 mm
Track gauge	1960 mm
Fuel tank capacity	103 L
Hydraulic oil tank capacity	74 L

Guangxi Yuchai Heavy Industry Co.,Ltd.  
 Address: No.168 Tianqiao Road, Yulin, Guangxi, China  
 Tel: +86-775-3223505, 3223500  
 Fax: +86-775-3289578  
 Email: dig@yuchai.cn, ychi-export@yuchai.cn  
 www.yuchaihi.com



Specifications are subject to change without prior notice