

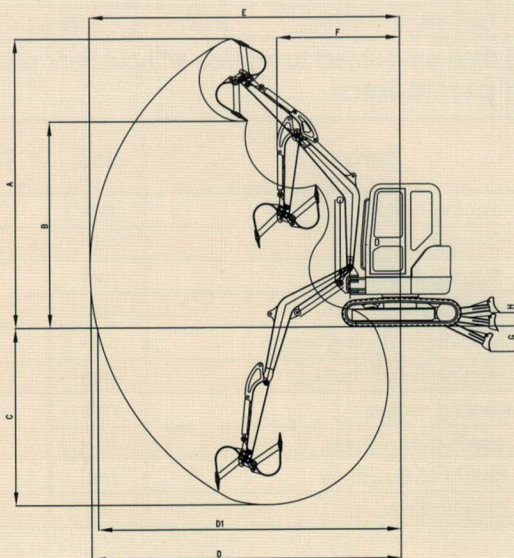


YC55SR

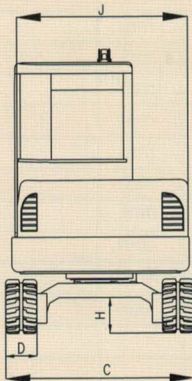

◎ Small whirling radius. Equipped with strong power and advanced hydraulic system. Easy and smart operating. Equipped with flip cab to facilitate regular maintenance.

◎ Equipped with NACHI multi-way valves to improve operating comfortableness.

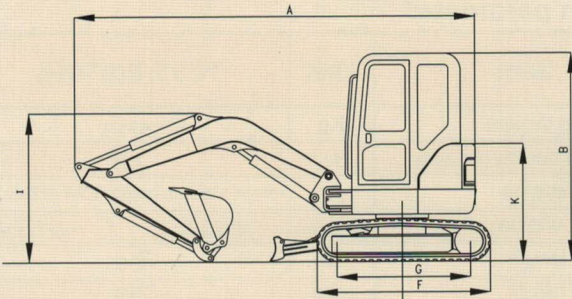

1.Dimension parameter

Code	Item	Unit	55SR
	Operating Weight	Kg	5710
	Standard bucket capacity	m ³	0.20
	Name of engine		YANMAR 4TNV94L-S
	Power of engine	KW/rpm	30.5/2200
A	Machine length	mm	5715
B	Machine height	mm	2715
C	Overall width	mm	2000
D	Crawler width	mm	400
F	Crawler length	mm	2600
G	Wheel-base	mm	2060
H	Min ground clearance	mm	345
J	Width of platform	mm	1936
K	Height of engine hood	mm	1600
	Width of bucket	mm	547
	Walking speed(low/high)	Km/h	2.8/4.7
	Platform slewing speed	rpm	10.4
	Cab		●
	Canopy		
	With swing boom		●
	Boom swing angle (left/right)	°	80 / 50

Note: Technical data are subject to replace without prior notice!

2.Operating parameters

Code	Item	Unit	55SR
A	Max. digging height	mm	5940
B	Max. Dumping height	mm	4050
C	Max. digging depth	mm	3790
D	Max. digging radius	mm	6360
D1	Max. horizontal digging length	mm	6227
E	Max. digging height radius	mm	6370
F	Min. slewing radius	mm	2465
G	Max. depth of Bulldozer	mm	460
H	Max. height of Bulldozer	mm	350
	Max. digging force	kN	25.7